


Made in India



- ▶ **Thickness:** 40 mm
- ▶ **Strength:** Positive Power Tolerance & PID resistant
- ▶ **Dimensions:** Up to 1957 x 990 mm
- ▶ **Resilience:** Windspeed -2400 Pa, Snowload - 5400 Pa
- ▶ **Survival:** World-class components produced in-house & best quality anti-reflective glass, giving a power output warranty of 25 Years

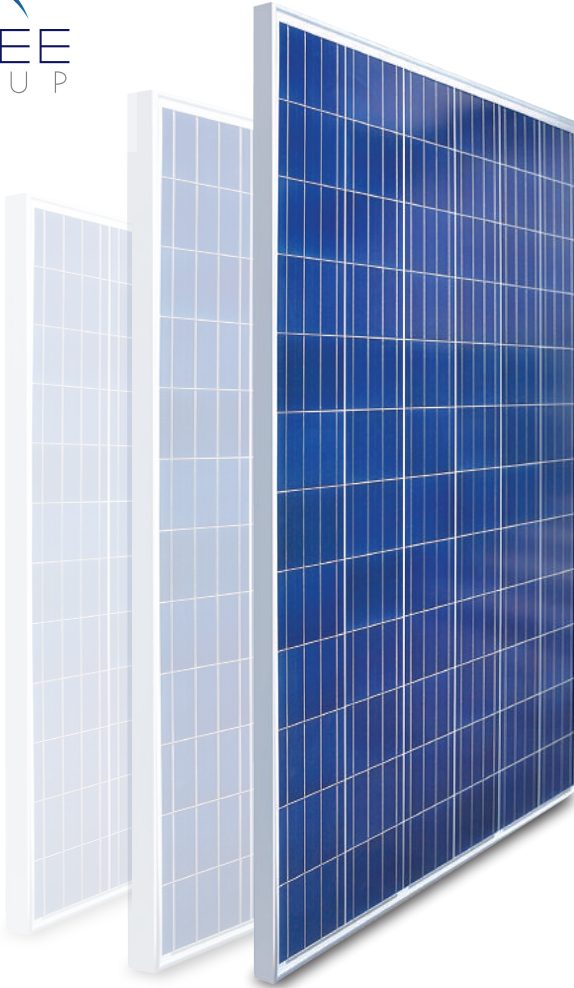

TECHNICAL DATA SHEET

| Type (Wp) | Dimension (mm) | V _{oc} (V) | I _{sc} (A) | V _{mp} (V) | I _{mp} (A) | Weight (kg) | Number of modules/pallet |
|-----------|-----------------|---------------------|---------------------|---------------------|---------------------|-------------|--------------------------|
| 10 | 423 x 243 x 22 | 21.46 | 0.72 | 17.49 | 0.67 | 1.5 | 11 Pcs./Box |
| 20 | 774 x 243 x 22 | 21.51 | 1.43 | 17.54 | 1.33 | 2.5 | 10 Pcs./Box |
| 50 | 559 x 659 x 34 | 21.67 | 3.03 | 17.67 | 2.85 | 4.5 | 28 |
| 80 | 837 x 659 x 34 | 21.82 | 4.79 | 17.82 | 4.50 | 6.5 | 28 |
| 90 | 965 x 659 x 34 | 21.85 | 5.45 | 17.85 | 5.05 | 8 | 28 |
| 100 | 1116 x 659 x 34 | 21.92 | 5.95 | 17.92 | 5.59 | 8.5 | 28 |
| 125 | 1301 x 659 x 34 | 22.08 | 7.38 | 18.04 | 6.94 | 9.5 | 28 |
| 140 | 1024 x 990 x 40 | 22.21 | 8.49 | 17.55 | 7.98 | 13 | 36 |
| 150 | 1024 x 990 x 40 | 22.79 | 8.67 | 18.44 | 8.15 | 13 | 36 |
| 250 | 1640 x 990 x 40 | 38.04 | 8.56 | 30.43 | 8.22 | 18 | 26 |
| 255 | 1640 x 990 x 40 | 38.28 | 8.69 | 30.62 | 8.34 | 18 | 26 |
| 260 | 1640 x 990 x 40 | 38.40 | 8.82 | 30.72 | 8.47 | 18 | 26 |
| 265 | 1640 x 990 x 40 | 38.46 | 8.99 | 30.77 | 8.63 | 18 | 26 |
| 270 | 1640 x 990 x 40 | 38.70 | 9.12 | 30.95 | 8.73 | 18 | 26 |
| 300 | 1957 x 990 x 40 | 45.65 | 8.56 | 36.52 | 8.22 | 21.5 | 26 |
| 305 | 1957 x 990 x 40 | 45.94 | 8.65 | 36.75 | 8.30 | 21.5 | 26 |
| 310 | 1957 x 990 x 40 | 46.08 | 8.76 | 36.86 | 8.41 | 21.5 | 26 |
| 315 | 1957 x 990 x 40 | 46.15 | 8.91 | 36.92 | 8.55 | 21.5 | 26 |
| 320 | 1957 x 990 x 40 | 46.18 | 9.06 | 37.20 | 8.61 | 21.5 | 26 |
| 325 | 1957 x 990 x 40 | 46.21 | 9.18 | 37.41 | 8.69 | 21.5 | 26 |

High Voltage PV Modules

| | | | | | | | |
|-------------|------------------|-------|------|-------|------|------|----|
| 100 | 988 x 730 x 34 | 45.50 | 2.88 | 37.80 | 2.69 | 7.5 | 28 |
| 220 | 1640 x 990 x 40 | 45.60 | 6.41 | 38.70 | 5.71 | 18 | 26 |
| 260 PRIME | 1627 x 1025 x 40 | 75.52 | 4.52 | 63.04 | 4.15 | 18.5 | 26 |
| 300 X-PRIME | 1934 x 1021 x 40 | 91.67 | 4.20 | 75.17 | 4.03 | 21.5 | 26 |

Galactic PV Modules

| | | | | | | | |
|-------------------------|------------------|-------|-------|-------|------|------|----|
| 340 (Multi Crystalline) | 1021 x 1934 x 40 | 45.80 | 9.54 | 37.65 | 9.05 | 21.5 | 26 |
| 355 (Mono Crystalline) | 1021 x 1934 x 40 | 45.85 | 9.73 | 38.75 | 9.20 | 21.5 | 26 |
| 365 (Multi PREC) | 1021 x 1934 x 40 | 46.50 | 9.86 | 38.97 | 9.43 | 21.5 | 26 |
| 380 (Mono PREC) | 1021 x 1934 x 40 | 46.70 | 10.08 | 39.40 | 9.70 | 21.5 | 26 |



Registered Office

Unit 4, Stuart 2 Business Park, 4 Hilda Avenue, Hennospark, Centurion, 0046

sales@drivedynamics.co.za | drivedynamics.co.za

+27 (0) 11 662 2491